
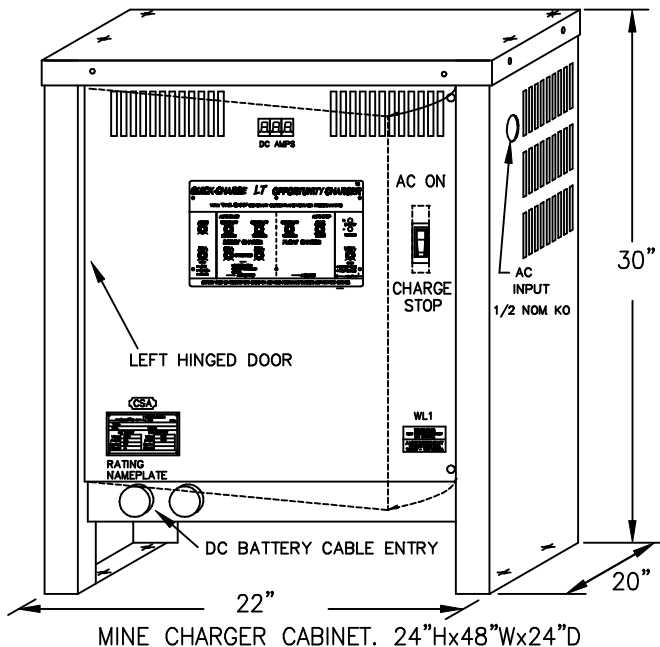


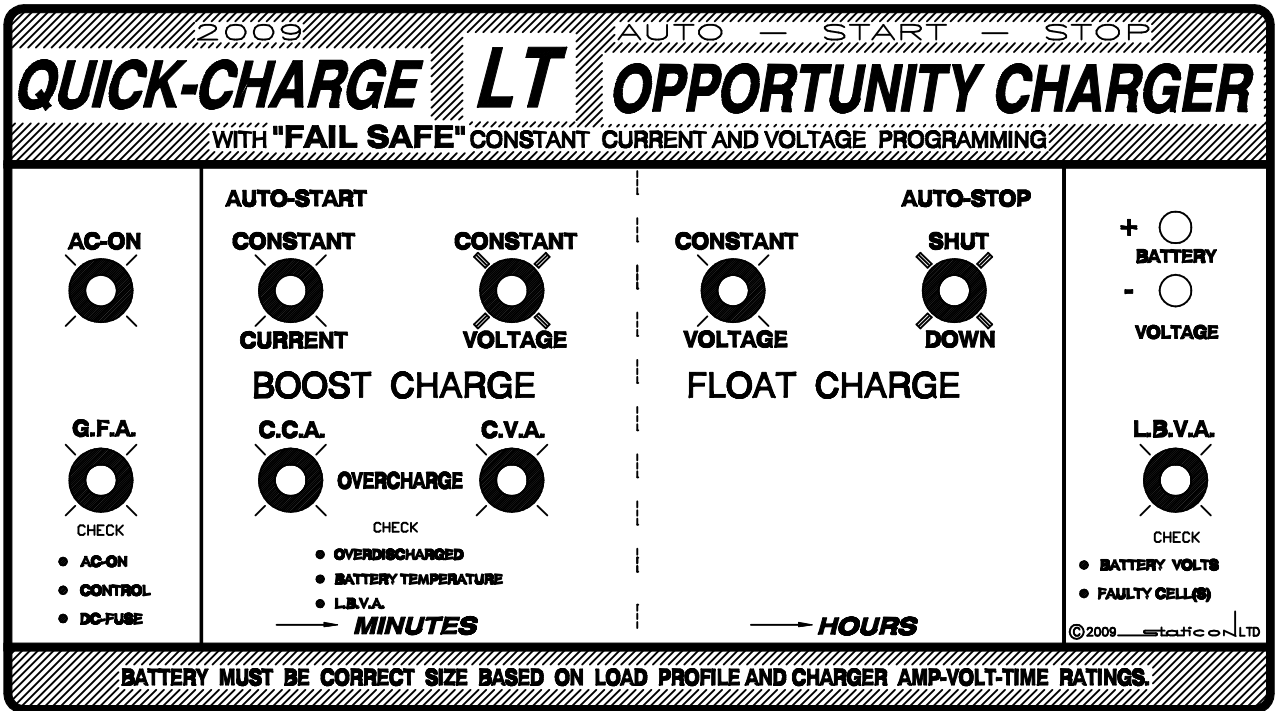

FEATURES:

- RELIABLE, 30 YEAR TIME PROVEN IUoU CHARGE TECHNOLOGY.
- NATURAL CONVECTION COOLING — NO FANS.
- 2 sec DELAYED AUTO-START FOLLOWED BY "SOFT WALK IN"
- BOOST-CHARGE UP TO 100% CURRENT FOR UP TO 30 min. TO ASSURE TOP LIFT TRUCK BATTERY PERFORMANCE.
- FLOAT-CHARGE WITH UP TO 50% CURRENT
- OPEN CELL OR HIGH RESISTANCE BATTERY FAULT-SHUTDOWN.
- LOW RIPPLE CURRENT — LONGER BATTERY LIFE.
- DC-OUTPUT FUSE IS O/L COORDINATED WITH RECTIFIER DIODES.
- IMMUNE TO EMI, RADIO, TIF INTERFERENCE.
- CSA APPROVED, DESIGNED TO UL/ANSI 1012 AND IEC STANDARDS
- AMP. METER, STATUS LIGHTS, ALARMS & ADJUSTMENTS AS SHOWN.
- MANUAL CHARGE STOP SWITCH.

RATINGS

V _{DC}	I _{DC}	TYPE No.	WEIGHT (kg)	3-PHASE AC-LINE CURRENT			
				600 V	480 V	208 V	240 V
24	200A	LAQ24...200	198	10	12	27	
	300A	LAQ24...300	260	14	17	40	
48	200A	LAQ48...200	264	19	23	56	
	300A	LAQ48...300	310	27	34	—	
	400A	LAQ48...400	360	36	45	—	
80 (96)	200A	LAQ80...200	308	30	38	—	
	300A	LAQ80...300	360	45	57	—	
	400A	LAQ80...400	450	60	76	—	
AC VOLTAGE CODE				K	F	E	

OPTIONS

- BATTERY TEMPERATURE COMPENSATION.
- REMOTE BOOST-FLOAT CHARGER STATUS.
- REMOTE ALARM STATUS.

WARRANTY

2 YEARS FULL + 3 YEARS (MAG'S & DIODES)

'FAIL SAFE' IUoU PROGRAMMED CHARGE CONTROL CORRECTLY CHARGES & CONDITIONS LT BATTERIES.



5-390 TAPSCOTT ROAD
SCARBOROUGH, ONTARIO
CANADA M1B 2Y9
E-MAIL: lasales@staticon.ca
TEL (416) 291-3723
FAX (416) 291-3871

YOU DONT HAVE TO SPEND BIG MONEYS UP FRONT TO PROOF-TEST
YOUR FAST BATTERY CHARGING OPERATION


STATICON QUICK CHARGE **LT** OPPORTUNITY CHARGERS ARE COST EFFECTIVE

- NO COSTLY CENTRALIZED INSTALLATION REQUIRED.
- NO SPECIAL CHARGE POWER AND INTERWIRING/CABLING.
- NO EXTRA FLOOR SPACE REQUIRED.
- NO COSTLY QUESTIONABLE EXPERIMENTING WITH:
1-ONLY HIGH POWER CHARGER, TRYING TO CHARGE UP TO
10 FORK LIFT BATTERIES WITH DIFFERENT STATES OF CHARGE.

OR WITH

HIGH POWER PULSE CHARGE/DISCHARGE TECHNOLOGY REQUIRING
SPECIAL BATTERY COOLING DESIGNS

STATICON "QUICK CHARGE LT" OPPORTUNITY CHARGERS PROVIDE
FAST, UP TO 40A/100AH, RELIABLE, FAIL SAFE, CHARGE CURRENT
"INDIVIDUALLY-OPTIMIZED" BASED ON THE STATE OF CHARGE
AND CONDITION OF YOUR BATTERY.

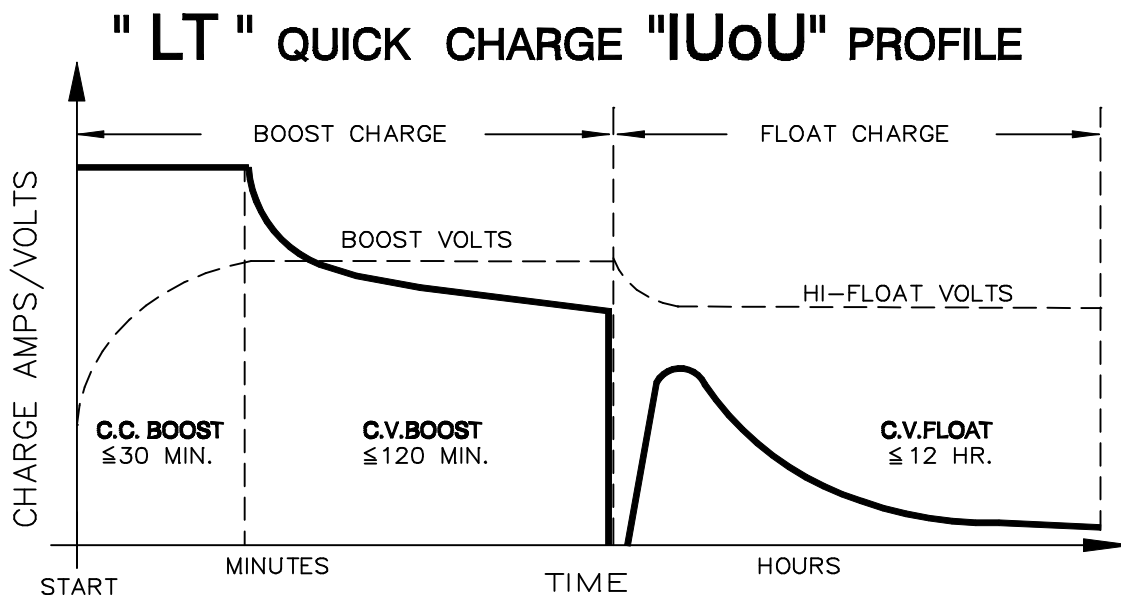

BATTERY MUST BE CORRECT SIZE BASED ON LOAD PROFILE AND CHARGER AMP-VOLT-TIME RATINGS.
SEE ATTACHED ORDER TAKING INFORMATION.